



WEATHERMATE™ Straight Flashing

WEATHERMATE™ Straight Flashing provides a tear-resistant seal that resists water intrusion around windows and doors. It is part of the complete WEATHERMATE™ Weather Barrier Solutions lineup from Dow – products designed to enhance the performance of the building envelope.

PROPERTIES

WEATHERMATE™ Straight Flashing combines a blue high-density polyethylene (HDPE) film facer with a butyl rubber adhesive that forms a strong mechanical and chemical bond to most building materials. A polymeric-coated paper release liner provides a more consistent peel than plain paper liners.

WEATHERMATE Straight Flashing contains no asphalt. The butyl rubber adhesive technology, a key component of this flashing, is considered superior to asphalt adhesives in compatibility with commonly used building envelope caulking materials, insulated and non-insulated sheathing, housewraps and window casing materials.

Properties of WEATHERMATE Straight Flashing are presented in Table 1. Performance testing results are presented in Table 2.

Installation

HOUSEWRAP OVER AN EXTERIOR SHEATHING ON A WOOD FRAME WALL

The instructions outlined here describe how to use WEATHERMATE™ Straight Flashing to flash a flanged window installed on a wall assembly consisting of housewrap over an exterior sheathing on a wood

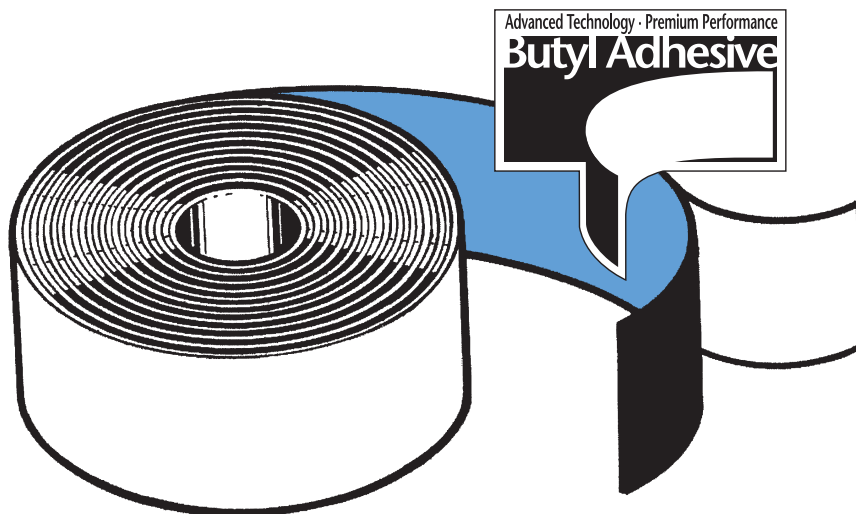


TABLE 1

Properties of WEATHERMATE™ Straight Flashing	
Face Material Composition	Cross-laminated HDPE film
Face Color	Blue
Adhesive Composition	Butyl rubber
Adhesive Color	Black
Thickness	20 mil
Release Liner	Polymeric-coated paper
Width	4", 6", 9"
Length	100'

TABLE 2

WEATHERMATE™ Straight Flashing Performance Testing	
Water Vapor Transmission, ASTM E96, perms	< 1
Minimum Application Temperature	30°F
UV Resistance	120 days

frame wall. For information on using WEATHERMATE Straight Flashing on other types of wall assemblies, contact your Dow representative or call 1-866-583-BLUE (2583).

Step 1:

- a. After installing housewrap over rough window openings, make an inverted "Y" cut in the housewrap at each window.

- b. Fold housewrap in at jambs and sill, fastening to inside face of framing.
- c. At the top of each jamb, cut the housewrap 6" at a 45-degree angle. Pull up and temporarily fasten above window opening (Figure 1).

Step 2:

Install WEATHERMATE™ Sill Pan according to complete manufacturer installation

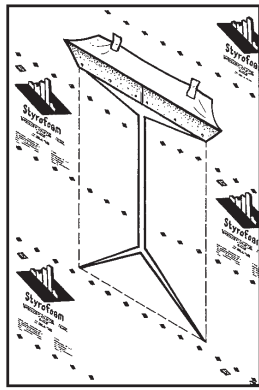


Figure 1

instructions (Figure 2). Seal overlap seam and top edge of corner pieces with WEATHERMATE™ Straight Flashing or WEATHERMATE™ Flexible Flashing. Note: WEATHERMATE™ Sill Pan works best when the window sill is sloped to the exterior.

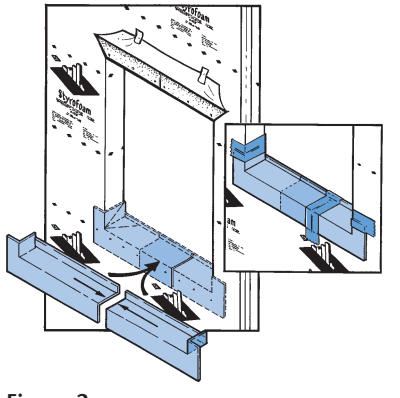


Figure 2

Alternatively, install a backdam and WEATHERMATE™ Flexible Flashing on the sill. For complete details, refer to the WEATHERMATE™ Flexible Flashing product/installation information sheet (Form No. 179-07302).

Step 3:

- a. Apply sealant at window jambs and head only. Or back-caulk the window, applying sealant on the back side of the nailing flange (Figure 3). Make sure sealants, housewraps and flashings are chemically compatible.

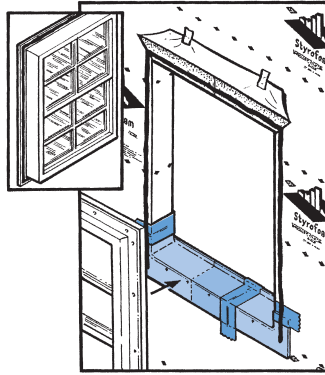


Figure 3

- b. Install window, plumb, level and square, per manufacturer instructions. Shims should be placed under WEATHERMATE Sill Pan, if necessary.
- c. Prepare substrate surface as necessary to ensure it is clean, dry and free of grease, dust or debris.
- d. A spray adhesive, such as 3M High Strength 90, is recommended if applying WEATHERMATE Flashings directly to OSB or other surfaces where additional adhesion may be required.

Step 4:

- a. Apply WEATHERMATE™ Straight Flashing along window jambs, overlapping WEATHERMATE™ Sill Pan or other sill flashing.

- b. Install a drip cap, if applicable.
- c. Next, install WEATHERMATE™ Straight Flashing along header (Figure 4).

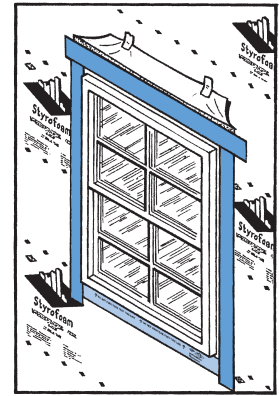


Figure 4

Step 5:

- Fold housewrap flap down and secure with WEATHERMATE™ Construction Tape (Figure 5). Air seal windows around entire interior perimeter with GREAT STUFF™ Pro Window & Door insulating foam sealant.

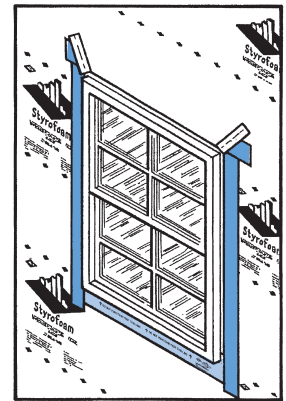


Figure 5

IN THE U.S.:

- For Technical Information: **1-866-583-BLUE (2583)**
- For Sales Information: **1-800-232-2436**

THE DOW CHEMICAL COMPANY

- Building Solutions • 200 Larkin • Midland, MI 48674 • www.insulateyourhome.com

NOTICE: No freedom from any patent owned by Dow or others is to be inferred. Because use conditions and applicable laws may differ from one location to another and may change with time, Customer is responsible for determining whether products and the information in this document are appropriate for Customer's use and for ensuring that Customer's workplace and disposal practices are in compliance with applicable laws and other government enactments. Dow assumes no obligation or liability for the information in this document. NO WARRANTIES ARE GIVEN; ALL IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY EXCLUDED.

Building and/or construction practices unrelated to building materials could greatly affect moisture and the potential for mold formation. No material supplier including Dow can give assurance that mold will not develop in any specific system.

